

Adaptor M12 Male / M12 Female

Buffer module for DO (Pin 4-3)

Art.No.: 55112

Weight: 0.045

Country of origin: DE

Model designation: M12/M12 Cap DO(4-3) 24VDC 11µF

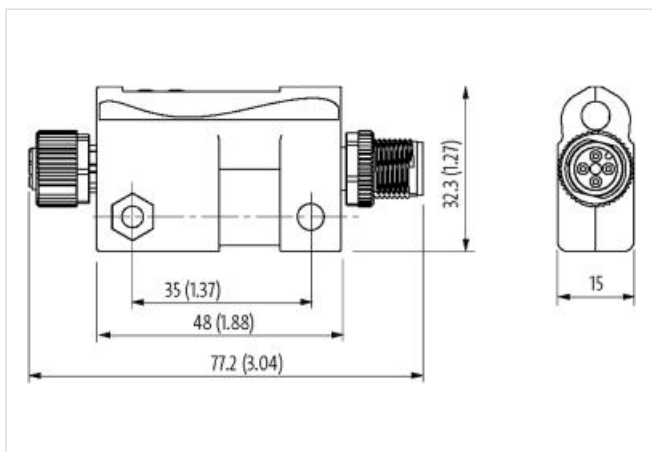
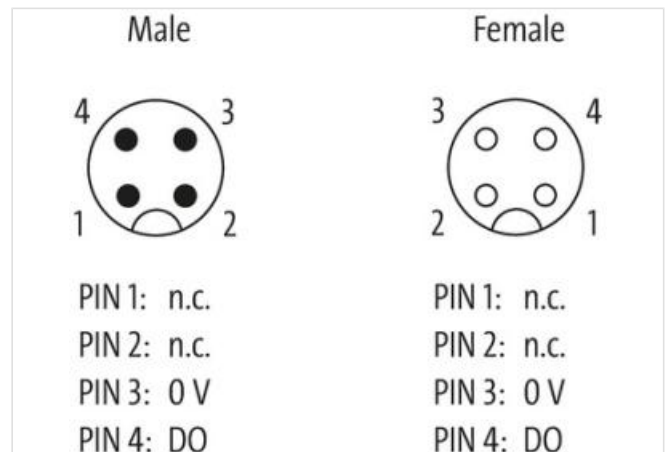
Adapter

Male - female

M12 – M12, 4-pole

max. 2 A

11 µF

[Link to Product](#)**Illustration**

Product may differ from Image

**Commercial data**

ECLASS-6.0

27143423

| | |
|-----------------------|---------------|
| ECLASS-6.1 | 27260702 |
| ECLASS-7.0 | 27440102 |
| ECLASS-8.0 | 27440102 |
| ECLASS-9.0 | 27440102 |
| ECLASS-10.1 | 27440102 |
| ECLASS-11.1 | 27440102 |
| ECLASS-12.0 | 27440106 |
| ETIM-5.0 | EC001855 |
| customs tariff number | 85322400 |
| customs tariff number | 85322400 |
| GTIN | 4048879713481 |
| GTIN | 4048879713481 |
| Packaging unit | 1 |
| Packaging unit | 1 |

Electrical data

| | |
|--------------------------|-------|
| Electrical capacity max. | 11 µF |
|--------------------------|-------|

Electrical data | Supply

| | |
|---------------------------|--------|
| Operating voltage DC | 24 V |
| Operating voltage DC min. | 18 V |
| Operating voltage DC max. | 30,2 V |
| Total current max. | 2 A |

Device protection | Electrical

| | |
|--|------------------|
| Degree of protection (EN IEC 60529) | IP67 |
| Additional condition protection degree | screwed, mounted |

Environmental characteristics | Climatic

| | |
|------------------------------------|--------|
| Operating temperature min. | -30 °C |
| Operating temperature max. | 70 °C |
| Storage temperature min. | -40 °C |
| Storage temperature max. | 85 °C |
| Relative humidity max. (operation) | 85 % |

Conformity

| | |
|------------------|------------|
| Product standard | EN 61131-2 |
|------------------|------------|