

MOTOR SUPPRESSOR

Varistor, 3x400VAC/7,5kW


3× 400 V AC

VDR

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Link to Product

Illustration

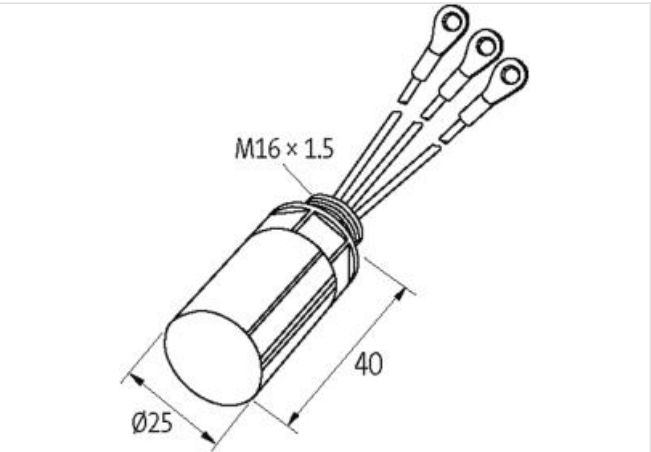

Product may differ from Image



| Commercial data | |
|-----------------|----------|
| ECLASS-6.0 | 27371013 |
| ECLASS-6.1 | 27371013 |
| ECLASS-7.0 | 27371013 |
| ECLASS-8.0 | 27371013 |
| ECLASS-9.0 | 27371013 |
| ECLASS-10.1 | 27371013 |

| | |
|---|---------------------|
| ECLASS-11.1 | 27371013 |
| ECLASS-12.0 | 27371013 |
| ETIM-5.0 | EC000197 |
| customs tariff number | 85363010 |
| GTIN | 4048879018920 |
| Packaging unit | 1 |
| Electrical data Input | |
| Input voltage AC | 400 V |
| Installation | |
| Connection cross section max. | 0,5 mm ² |
| Installation Connection | |
| Connection information | Single strands |
| Length single strands | 100 mm |
| Ring terminals | M6isolated |
| Device protection Media | |
| Flame resistance | flame retardant |
| Mechanical data Material data | |
| Combustibility class housing (UL94) | V-0 |
| Material housing | Plastic |
| Material potting compound | 2-component epoxy |
| Mechanical data Mounting data | |
| Mounting method | inserted |
| Suitable for mounting type | Motorklemmkasten |
| Height | 25 mm |
| Width | 25 mm |
| Depth | 40 mm |
| Environmental characteristics Climatic | |
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C |