



SUPPRESSOR FOR CONTACTORS

Diode combination, 240 VDC, 50 W

24 V DC
Z-Diode
For other configurations and voltages, please inquire.

[Link to Product](#)

Illustration

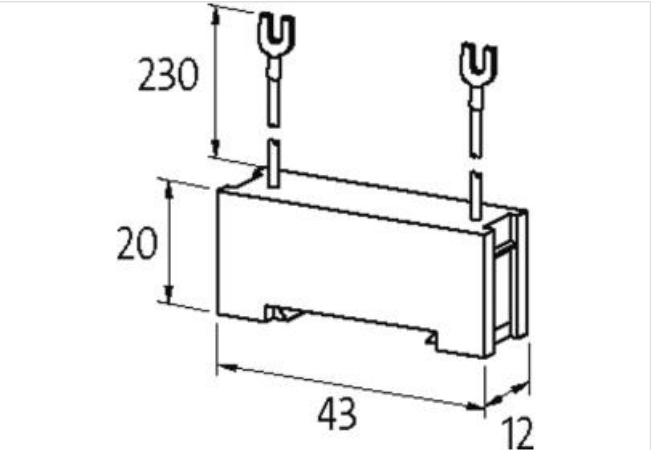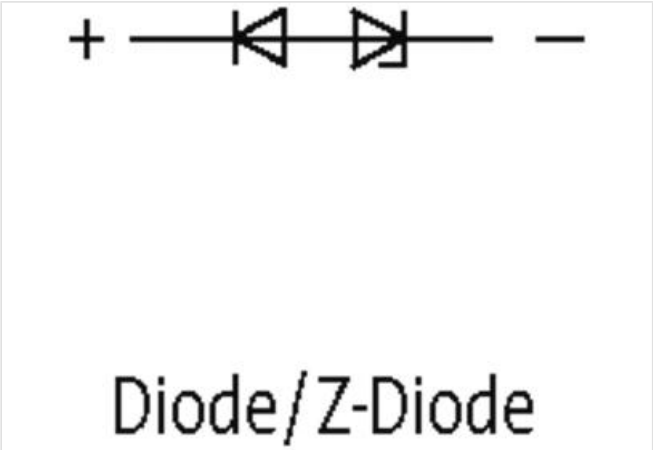

Product may differ from Image



| Commercial data | |
|-----------------|----------|
| ECLASS-6.0 | 27371013 |
| ECLASS-6.1 | 27371013 |
| ECLASS-7.0 | 27371013 |
| ECLASS-8.0 | 27371013 |
| ECLASS-9.0 | 27371013 |
| ECLASS-10.1 | 27371013 |

| | |
|---|---------------|
| ECLASS-11.1 | 27371013 |
| ECLASS-12.0 | 27371013 |
| ETIM-5.0 | EC002498 |
| customs tariff number | 85363010 |
| GTIN | 4048879018258 |
| Packaging unit | 1 |
| Compatibility Compatible with | |
| Appropriate contactors | universal |
| Electrical data | |
| Holding power max. | 50 W |
| Electrical data Input | |
| Input voltage DC min. | 0 V |
| Input voltage DC max. | 240 V |
| Mechanical data Mounting data | |
| Height | 20 mm |
| Width | 43 mm |
| Depth | 12 mm |
| Environmental characteristics Climatic | |
| Operating temperature min. | -20 °C |
| Operating temperature max. | 70 °C |