


MIRO TH 110VAC/DC SK OPTO-COUPLER MODULE

IN: 130 VAC/DC - OUT: 250 VAC / 0,5A


Triac 0.5 A  
110 V AC/DC  
Screw terminals

[Link to Product](#)

Illustration

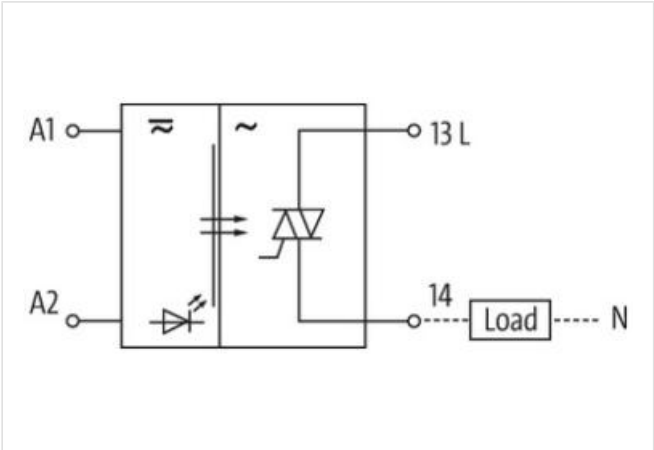

Product may differ from Image

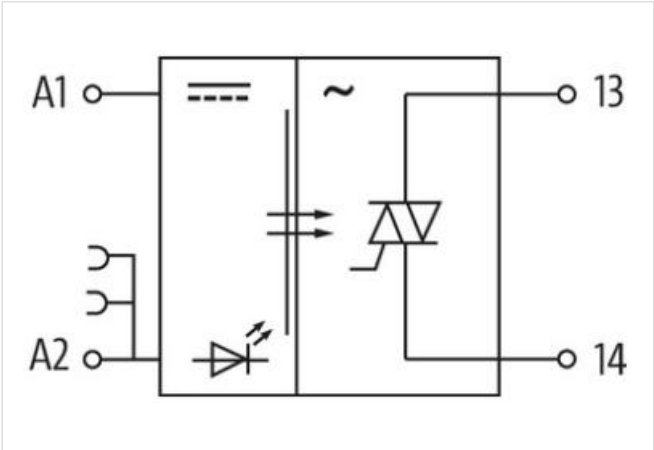

Commercial data	
ECLASS-6.0	27371604
ECLASS-6.1	27371604
ECLASS-7.0	27371604
ECLASS-8.0	27371604
ECLASS-9.0	27371604
ECLASS-10.1	27371604

ECLASS-11.1	27371604
ECLASS-12.0	27371604
ETIM-5.0	EC001504
customs tariff number	85414900
GTIN	4048879026765
Packaging unit	1
<b>Electrical data   Input</b>	
Input voltage AC min.	70 V
Input voltage AC max.	130 V
Input voltage OFF AC min.	0 V
Input voltage OFF AC max.	35 V
Input voltage OFF DC min.	0 V
Input voltage OFF DC max.	35 V
Input voltage DC min.	70 V
Input voltage DC max.	130 V
Input current max.	3,6 mA
<b>Electrical data   Output</b>	
Switch off delay max.	10 ms
Switch on delay max.	10 ms
Quiescent current OFF max.	300 mA
Additional condition switching frequency	depending on wiring
Switching frequency max.	20 Hz
Voltage switching AC min.	12 V
Switching voltage AC max.	250 V
Switching current min.	2 mA
Switching current max.	0,5 A
Voltage drop AC max.	1,5 V
<b>Diagnostics</b>	
Status indication LED	yellow
<b>Device protection   Electrical</b>	
Rated surge voltage	2,5 kV
<b>Device protection   Media</b>	
Flame resistance	flame retardant
<b>Mechanical data   Material data</b>	
Color housing	black
Material housing	Plastic
<b>Mechanical data   Mounting data</b>	
Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	78 mm
Width	6,2 mm
Depth	70 mm
<b>Environmental characteristics   Climatic</b>	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
<b>Connection type 4</b>	
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	black

No. of poles	1
PIN 1	13
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	14
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	A 1
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	A 2