

IMPACT67 COMPACT MODULE, PLASTIC

Ethernet/IP, 8 dig. Out


Digital outputs  
DO8 - 2 A  
Ethernet 10/100 Mbit/s; M12, D-coded  
7/8", 5-pole, 2× max. 9 A  
M12, 5-pole, A-coded  
Connection cables are in the online shop under "Connection Technology".  
Housing fully potted.  
mounting compatible with I/O modules of the MVK series

Link to Product

Illustration



Product may differ from Image

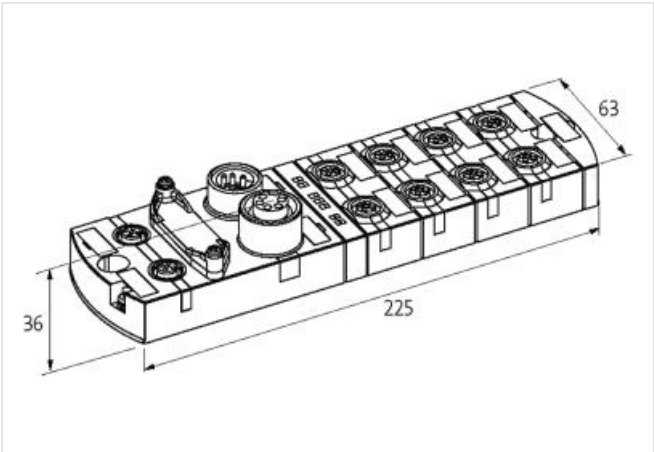

Commercial data

ECLASS-6.0	27242604
ECLASS-6.1	27242604
ECLASS-7.0	27242604
ECLASS-8.0	27242604
ECLASS-9.0	27242604
ECLASS-10.1	27242604
ECLASS-11.1	27242604
ECLASS-12.0	27242604
ETIM-5.0	EC001599
customs tariff number	85389099
GTIN	4048879051934
Packaging unit	1

Electrical data | Supply

Total current UA max.	9 A
Total current US max.	9 A

Electrical data | Output

Overload resistant	yes
--------------------	-----

Short-circuit protected	yes
-------------------------	-----

Output current per pin max.	2 A
-----------------------------	-----

#### Industrial communication | Ethernet/IP

EtherNet/IP addressing	BOOTP, DHCP, Rotary switch
------------------------	----------------------------

#### Diagnostics

Diagnostic	No voltage, Under voltage
------------	---------------------------

Diagnostic via BUS	per module and channel
--------------------	------------------------

Diagnostic via LED	per module and channel
--------------------	------------------------

LED display	Ethernet connection/data traffic
-------------	----------------------------------

#### Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
-------------------------------------	------

#### Mechanical data | Mounting data

Suitable for mounting type	2-hole screw mounting
----------------------------	-----------------------

Height	39 mm
--------	-------

Width	63 mm
-------	-------

Depth	225 mm
-------	--------

#### Environmental characteristics | Climatic

Operating temperature min.	-25 °C
----------------------------	--------

Operating temperature max.	55 °C
----------------------------	-------

Storage temperature min.	-25 °C
--------------------------	--------

Storage temperature max.	70 °C
--------------------------	-------

#### Connection type 5

Connection type 1	0, 2, 4, 6
-------------------	------------

Connection type 2	1, 3, 5, 7
-------------------	------------

Connection type 3	Port1, Port2
-------------------	--------------

Connection type 4	Power In
-------------------	----------

Connection type 5	Power Out
-------------------	-----------

Family construction form	M12
--------------------------	-----

Gender	female
--------	--------

Color contact carrier	black
-----------------------	-------

Coding	A
--------	---

No. of poles	5
--------------	---

PIN 1	n.c.
-------	------

PIN 2	DO 01 03 05 07
-------	----------------

PIN 3	0 V
-------	-----

PIN 4	DO 00 02 04 06
-------	----------------

PIN 5	PE
-------	----

Family construction form	M12
--------------------------	-----

Gender	female
--------	--------

Color contact carrier	black
-----------------------	-------

Coding	A
--------	---

No. of poles	5
--------------	---

PIN 1	n.c.
-------	------

PIN 2	n.c.
-------	------

PIN 3	0 V
-------	-----

PIN 4	DO 01 03 05 07
-------	----------------

PIN 5	PE
-------	----

Mounting method	inserted, screwed
-----------------	-------------------

Tightening torque	0,6 Nm
-------------------	--------

Family construction form	M12
--------------------------	-----

Gender	female
Color contact carrier	black
Coding	D
No. of poles	4
PIN 1	TD +
PIN 2	RD +
PIN 3	TD -
PIN 4	RD -
Family construction form	7/8"
Gender	male
Color contact carrier	black
No. of poles	5
PIN 1	0 V
PIN 2	0 V
PIN 3	PE
PIN 4	24 V DC (US)
PIN 5	24 V DC (UA)
Family construction form	7/8"
Gender	female
Color contact carrier	black
No. of poles	5
PIN 1	0 V
PIN 2	0 V
PIN 3	PE
PIN 4	24 V DC (US)
PIN 5	24 V DC (UA)