



Adaptor M12 Male / M12 Female

Buffer module for DO (Pin 4-3)

Adapter  
Male - female  
M12 – M12, 4-pole  
max. 2 A  
11 µF

Link to Product

Illustration

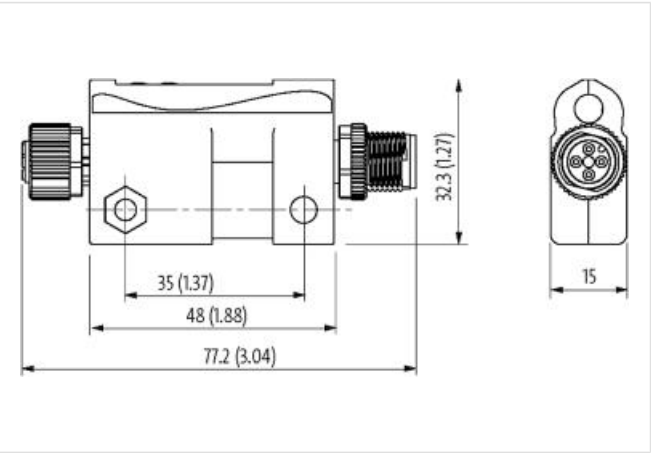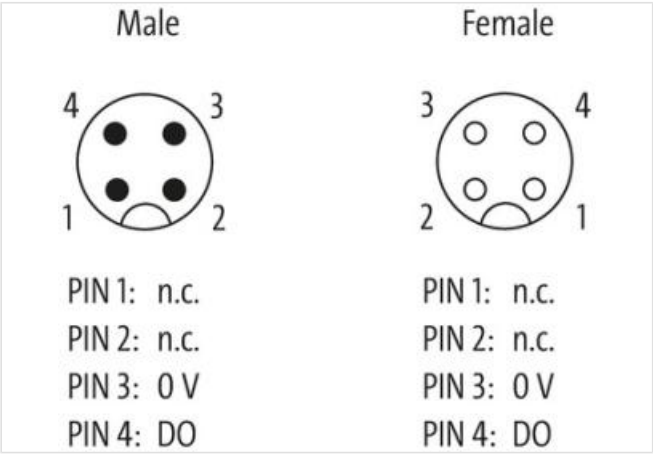

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27143423 |
| ECLASS-6.1      | 27260702 |
| ECLASS-7.0      | 27440102 |
| ECLASS-8.0      | 27440102 |
| ECLASS-9.0      | 27440102 |

|                       |               |
|-----------------------|---------------|
| ECLASS-10.1           | 27440102      |
| ECLASS-11.1           | 27440102      |
| ECLASS-12.0           | 27440106      |
| ETIM-5.0              | EC001855      |
| customs tariff number | 85322400      |
| GTIN                  | 4048879713481 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                           |        |
|---------------------------|--------|
| Operating voltage DC      | 24 V   |
| Operating voltage DC min. | 18 V   |
| Operating voltage DC max. | 30,2 V |
| Total current max.        | 2 A    |

**Device protection | Electrical**

|  |                  |
|--|------------------|
| Degree of protection (EN IEC 60529)    | IP67             |
| Additional condition protection degree | screwed, mounted |

**Environmental characteristics | Climatic**

|                                    |        |
|------------------------------------|--------|
| Operating temperature min.         | -30 °C |
| Operating temperature max.         | 70 °C  |
| Storage temperature min.           | -40 °C |
| Storage temperature max.           | 85 °C  |
| Relative humidity max. (operation) | 85 %   |

**Conformity**

|                  |            |
|------------------|------------|
| Product standard | EN 61131-2 |
|------------------|------------|