



**SAFETY WIRING SYSTEM**

EMERGENCY OFF PUSH BUTTON with M12


E-Stop 72 2NC M12(4)  
with M12 connection  
4-pole  
Emergency-Stop button  
2 NC (positively-opening)

[Link to Product](#)

Illustration

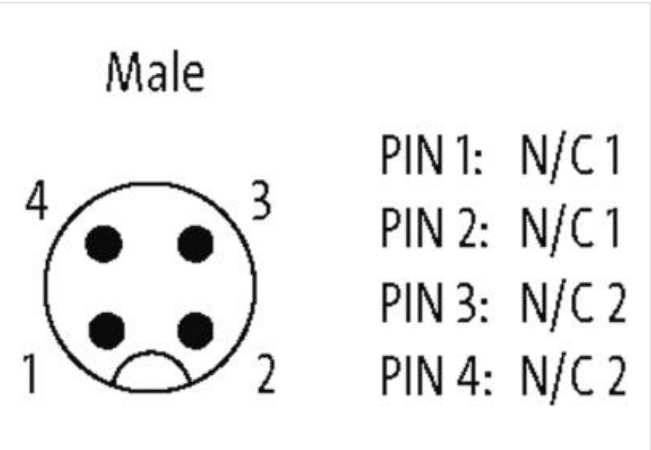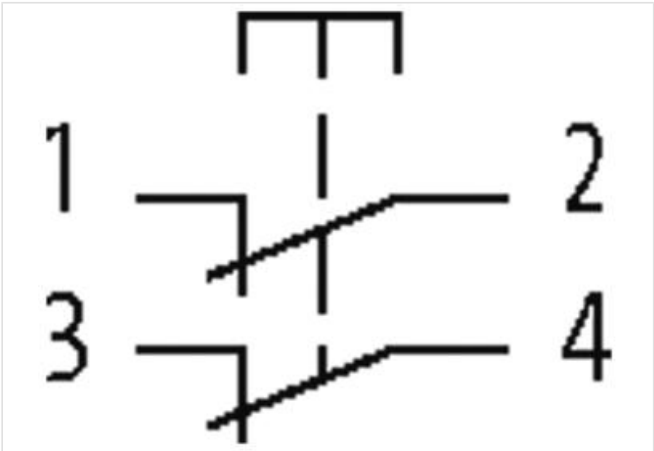

Product may differ from Image

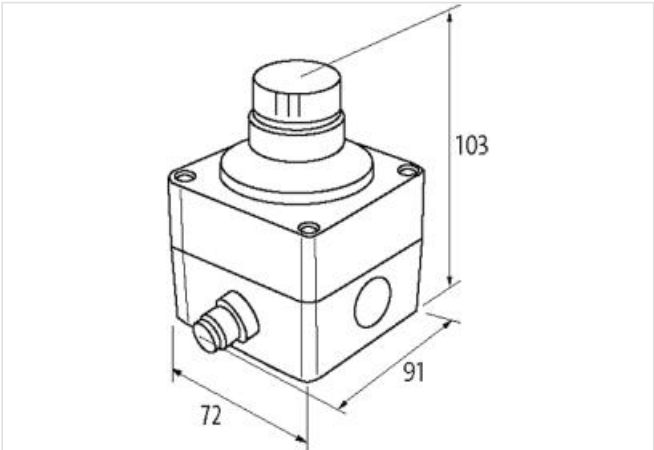

| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27371244 |
| ECLASS-6.1      | 27371244 |
| ECLASS-7.0      | 27371244 |
| ECLASS-8.0      | 27371244 |
| ECLASS-9.0      | 27371244 |

|                       |               |
|-----------------------|---------------|
| ECLASS-10.1           | 27371244      |
| ECLASS-11.1           | 27371244      |
| ECLASS-12.0           | 27371244      |
| ETIM-5.0              | EC002034      |
| customs tariff number | 85365080      |
| GTIN                  | 4048879050654 |
| Packaging unit        | 1             |

**Electrical data | Output**

|   |             |
|---|-------------|
| Utilization category AC-15 (EN IEC 60947-5-1) | 3 A @ 250 V |
| Utilization category DC-13 (EN IEC 60947-5-1) | 2 A @ 24 V  |
| Switching current (AC-15)                     | 30 A        |
| Switching current (DC-13)                     | 2,2 A       |

**Device protection**

|                    |                                       |
|--------------------|---------------------------------------|
| Condition lifetime | load-dependent, temperature dependent |
|--------------------|---------------------------------------|

**Device protection | Electrical**

|                                     |                |
|-------------------------------------|----------------|
| Degree of protection (EN IEC 60529) | IP65           |
| Electrical lifetime                 | 1000000 Cycles |

**Device protection | Mechanical**

|                      |                |
|----------------------|----------------|
| Mechanical endurance | 1000000 Cycles |
| Operating life B10d  | 250000 Cycles  |

**Mechanical data**

|                  |      |
|------------------|------|
| Bounce time max. | 9 ms |
|------------------|------|

**Mechanical data | Material data**

|                  |      |
|------------------|------|
| Material contact | AgNi |
|------------------|------|

**Mechanical data | Mounting data**

|                 |         |
|-----------------|---------|
| Mounting method | screwed |
| Height          | 103 mm  |
| Width           | 72 mm   |
| Depth           | 91 mm   |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 60 °C  |
| Storage temperature min.   | -25 °C |
| Storage temperature max.   | 85 °C  |

**Technical Data | Reliability**

|                                |      |
|--------------------------------|------|
| Lambda normally closed contact | 20 % |
|--------------------------------|------|

**Connection type 1**

|                          |       |
|--------------------------|-------|
| Family construction form | M12   |
| Gender                   | male  |
| Color contact carrier    | black |
| Coding                   | A     |
| No. of poles             | 4     |
| PIN 1                    | NC 1  |
| PIN 2                    | NC 1  |
| PIN 3                    | NC 2  |
| PIN 4                    | NC 2  |