


## POTENTIAL TERMINAL BLOCK BL.YELL.BR.BL

Potential terminal block blue/yellow/brown/blue

## **Link to Product**

## Illustration



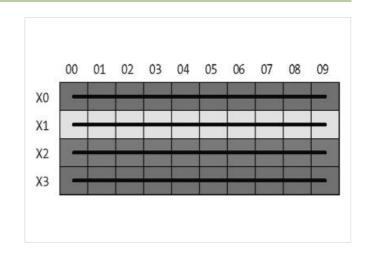

Product may differ from Image







Commercial data	
ECLASS-6.0	27141106
ECLASS-6.1	27141106
ECLASS-7.0	27141106
ECLASS-8.0	27141106
ECLASS-9.0	27141106
ECLASS-10.1	27141106
ECLASS-11.1	27141106
ECLASS-12.0	27141106
ETIM-5.0	EC001283
customs tariff number	85369010
GTIN	4048879049351
Packaging unit	1
Electrical data   Supply	
Operating voltage AC max.	30 V
Operating voltage DC max.	30 V
Total current max.	10 A
Installation	
Connection cross section max.	2,5 mm²
AWG number min.	28
AWG number max.	14
Installation   Connection	
Connection	Spring clamp plug-in terminals
Device protection   Electrical	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-15



Degree of protection (EN IEC 60529)	IP20	
Mechanical data   Mounting data		
Height	70 mm	
Width	56 mm	
Depth	32,5 mm	
Environmental characteristics   Climatic		

Depth	32,5 mm	
Environmental characteristics   Climatic		
Operating temperature min.	0 °C	
Operating temperature max.	55 °C	
Storage temperature min.	-40 °C	
Storage temperature max.	85 °C	