

## IMPACT20 CANOPEN, DIGITAL OUTPUT MODULE

16 digital outputs

Digital outputs

DO16 - 0.5 A

Connection cables are in the online shop under "Connection Technology".


Housing fully potted.

### [Link to Product](#)

#### Illustration



Product may differ from Image

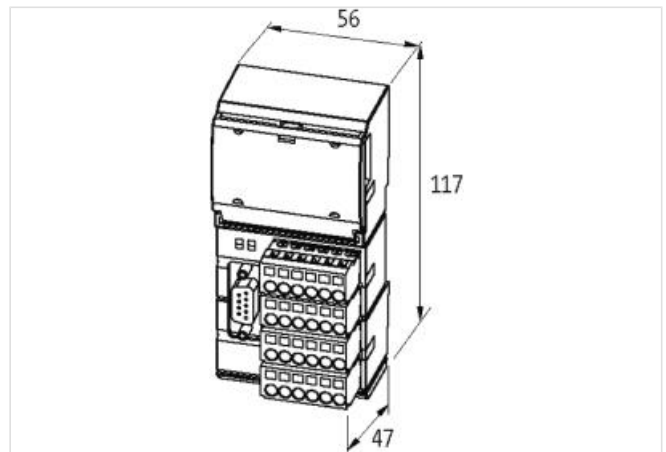

#### Commercial data

ECLASS-6.0	27242604
ECLASS-7.0	27242604
ECLASS-8.0	27242604
ECLASS-9.0	27242604
ETIM-5.0	EC001599
customs tariff number	85389099
GTIN	4048879048057
Packaging unit	1

#### Electrical data | Supply

Operating voltage DC	24 V
Total current max.	8 A
Total current UA max.	12 A

#### Electrical data | Output

Overload resistant	yes
Short-circuit protected	yes
Output current per pin max.	0,5 A

#### Industrial communication | Bus data

Address range min.	1
Address range max.	99

**Industrial communication | CANopen**

CANopen addressing	Rotary switch
--------------------	---------------

**Diagnostics**

Diagnostic	No voltage, Under voltage
Diagnostic via BUS	per module and channel
Diagnostic via LED	per module and channel
Short circuit diagnosis	yes
LED display	Ethernet connection/data traffic
Overload diagnosis	yes

**Installation**

Connection cross section max.	2,5 mm <sup>2</sup>
-------------------------------	---------------------

**Device protection | Electrical**

Degree of protection (EN IEC 60529)	IP20
-------------------------------------	------

**Mechanical data | Mounting data**

Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	117 mm
Width	56 mm
Depth	47 mm

**Environmental characteristics | Climatic**

Operating temperature min.	0 °C
Operating temperature max.	55 °C
Storage temperature min.	-20 °C
Storage temperature max.	70 °C

**Conformity**

Product standard	EN 61131-2
------------------	------------

**Connection type 5**

Connection type 1	Bus In
Connection type 2	X0
Connection type 3	X1
Connection type 4	X2
Connection type 5	X3
Family construction form	D-Sub
Gender	male
Color contact carrier	black
No. of poles	9
PIN 1	n.c.
PIN 2	CAN_LOW
PIN 3	CAN_GND
PIN 4	n.c.
PIN 5	CAN_SHLD
PIN 6	PE
PIN 7	CAN_HIGH
PIN 8	n.c.
PIN 9	PE
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	colorless
No. of poles	6
PIN 1	CH 00

PIN 2	CH 01
PIN 3	CH 02
PIN 4	CH 03
PIN 5	UI
PIN 6	0 V
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	colorless
No. of poles	6
PIN 1	CH 10
PIN 2	CH 11
PIN 3	CH 12
PIN 4	CH 13
PIN 5	UA
PIN 6	0 V
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	colorless
No. of poles	6
PIN 1	CH 20
PIN 2	CH 21
PIN 3	CH 22
PIN 4	CH 23
PIN 5	n.c.
PIN 6	0 V
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	colorless
No. of poles	6
PIN 1	CH 30
PIN 2	CH 31
PIN 3	CH 32
PIN 4	CH 33
PIN 5	FE
PIN 6	FE