


TREE 8TX METAL - UNMANAGED SWITCH - 8 PORTS

8 port unmanaged switch (UL-Listed) Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration

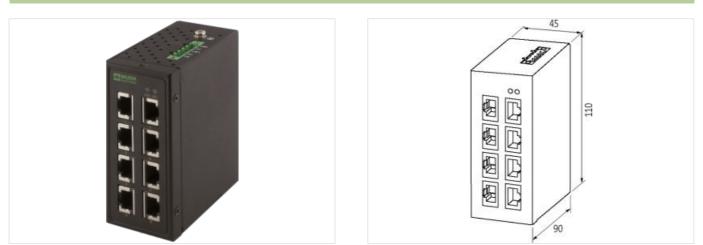

Product may differ from Image



0...... analal data

Commercial data		
ECLASS-6.0	19170106	
ECLASS-6.1	19170106	
ECLASS-7.0	19170106	
ECLASS-8.0	19170106	
ECLASS-9.0	19170402	
ECLASS-10.1	19170402	
ECLASS-11.1	19170402	
ECLASS-12.0	19170402	
ETIM-5.0	EC000734	
customs tariff number	85176200	
GTIN	4048879439466	
Packaging unit	1	
Electrical data Supply		
Operating voltage DC min.	9 V	
Operating voltage DC max.	48 V	
Industrial communication		
Data transmission rate max.	100 MBit/s	
Industrial communication Ethern	et functionality	
Auto-crossover	yes	
Auto-negotiation	yes	
duplex	Full duplex	
Switch type	unmanaged	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-05

Murrelektronik Canada | 2840 Argentia Rd Unit #9 | L5N 8G4 Mississauga, ON | Fon +1 905-362-2211 | Fax +1 905-362-2101 | shop@murr.ca | shop.murr.ca



VLAN unmanaged (IEEE 802.1Q)	yes	
Diagnostics		
Alarm contact	no	
Diagnostic	No voltage	
LED display	Ethernet connection/data traffic	
Device protection Electrical		
Degree of protection (EN IEC 60529)	IP50	
Mechanical data Material data		
Color housing	black	
Material housing	Metal	
Mechanical data Mounting data		
Mounting method	geschnappt	
Suitable for mounting type	Mounting rail TH35, (EN 60715)	
Height	110 mm	
Width	45,3 mm	
Depth	89,6 mm	
Environmental characteristics Climatic		
Operating temperature min.	-10 °C	
Operating temperature max.	70 °C	
Storage temperature min.	-40 °C	
Storage temperature max.	85 °C	
Connection type 2		
Connection type 1	8	
Connection type 2	X1	
Family construction form	RJ45	
Gender	female	
Color contact carrier	black	
No. of poles	8	
PIN 1	TD +	
PIN 2	TD -	
PIN 3	RD +	
PIN 4	n.c.	
PIN 5	n.c.	
PIN 6	RD -	
PIN 7	n.c.	
PIN 8	n.c.	
Connection	Plug-in terminals RK	
Family construction form	terminal	
Gender	male	
Color contact carrier	green	
No. of poles	5	
PIN 1	24 V DC (UB 2)	
PIN 2	0 V	
PIN 3	24 V DC (UB 1)	
PIN 4	0 V	
PIN 5	PE	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-05

Murrelektronik Canada | 2840 Argentia Rd Unit #9 | L5N 8G4 Mississauga, ON | Fon +1 905-362-2211 | Fax +1 905-362-2101 | shop@murr.ca | shop.murr.ca