

TREE 8TX METALL - UNMANAGED SWITCH - 8 PORTS


8 port unmanaged switch  
Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration



Product may differ from Image

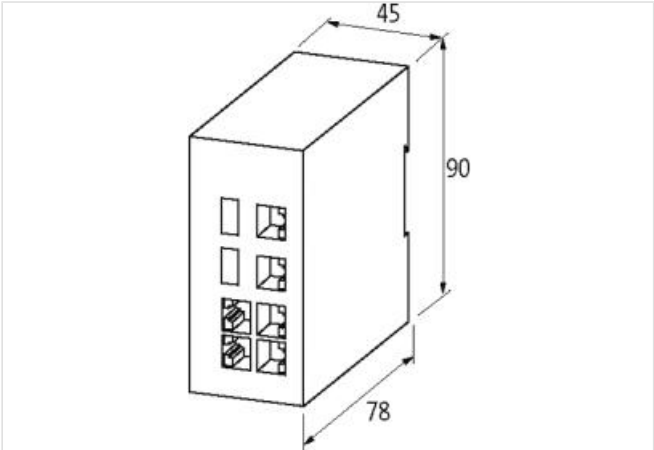

| Commercial data                                   |               |
|---|---------------|
| ECLASS-6.0  | 19170106      |
| ECLASS-6.1  | 19170106      |
| ECLASS-7.0  | 19170106      |
| ECLASS-8.0  | 19170106      |
| ECLASS-9.0  | 19170402      |
| ECLASS-10.1                                       | 19170402      |
| ECLASS-11.1                                       | 19170402      |
| ECLASS-12.0                                       | 19170402      |
| ETIM-5.0  | EC000734      |
| customs tariff number                             | 85176200      |
| GTIN  | 4048879329576 |
| Packaging unit                                    | 1             |
| Electrical data   Supply                          |               |
| Operating voltage DC min.                         | 9 V           |
| Operating voltage DC max.                         | 48 V          |
| Current consumption max.                          | 350 mA        |
| Industrial communication                          |               |
| Data transmission rate max.                       | 100 MBit/s    |
| Industrial communication   Ethernet functionality |               |
| Auto-crossover                                    | yes           |
| Auto-negotiation                                  | yes           |
| duplex  | Full duplex   |
| Switch type                                       | unmanaged     |

VLAN unmanaged (IEEE 802.1Q) yes

#### Diagnostics

Alarm contact no

Diagnostic No voltage

LED display Ethernet connection/data traffic

#### Device protection | Electrical

Degree of protection (EN IEC 60529) IP40

Invers-polarity protection yes

Over voltage protection yes

#### Mechanical data | Material data

Color housing black

Material housing Metal

#### Mechanical data | Mounting data

Mounting method geschnappt

Suitable for mounting type Mounting rail TH35, (EN 60715)

Height 90 mm

Width 45,2 mm

Depth 78 mm

#### Environmental characteristics | Climatic

Operating temperature min. -10 °C

Operating temperature max. 70 °C

Storage temperature min. -40 °C

Storage temperature max. 85 °C

#### Connection type 2

Connection type 1 8

Connection type 2 X1

Family construction form RJ45

Gender female

Color contact carrier black

No. of poles 8

PIN 1 TD +

PIN 2 TD -

PIN 3 RD +

PIN 4 n.c.

PIN 5 n.c.

PIN 6 RD -

PIN 7 n.c.

PIN 8 n.c.

Connection Plug-in terminals RK

Family construction form terminal

Gender male

Color contact carrier green

No. of poles 5

PIN 1 24 V DC (UB 2)

PIN 2 0 V

PIN 3 24 V DC (UB 1)

PIN 4 0 V

PIN 5 PE