

Xelity 8TX Unmanaged Switch 8 Port 100Mbit


8 port unmanaged switch  
Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration



Product may differ from Image

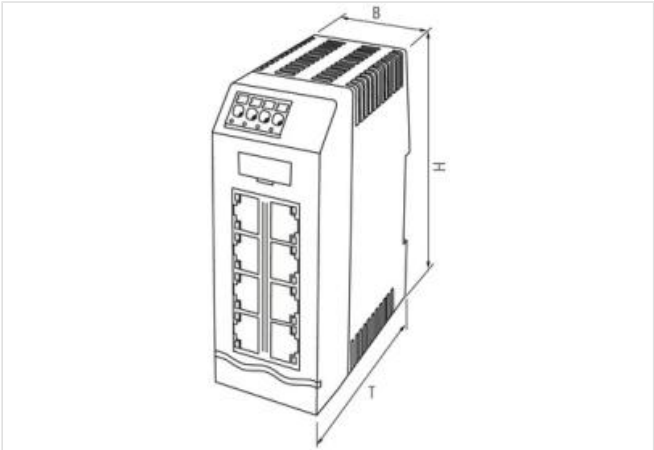

Commercial data

ECLASS-6.0	19170106
ECLASS-6.1	19170106
ECLASS-7.0	19170106
ECLASS-8.0	19170106
ECLASS-9.0	19170106
ECLASS-10.1	19170402
ECLASS-11.1	19170402
ECLASS-12.0	19170402
ETIM-5.0	EC000734
customs tariff number	85176200
GTIN	4048879798808
Packaging unit	1

Electrical data | Supply

Operating voltage DC min.	9,5 V
Operating voltage DC max.	31,5 V
Power consumption max.	1,2 W
Current consumption max.	50 mA

Industrial communication

Data transmission rate max.	100 MBit/s
-----------------------------	------------

Industrial communication | Ethernet functionality

Auto-crossover	yes
Auto-negotiation	yes
duplex	Full duplex

Switch type	unmanaged
VLAN unmanaged (IEEE 802.1Q)	yes
<b>Diagnostics</b>	
Alarm contact	no
Diagnostic	No voltage
LED display	Ethernet connection/data traffic
<b>Device protection   Electrical</b>	
Degree of protection (EN IEC 60529)	IP20
Invers-polarity protection	yes
Over voltage protection	yes
<b>Mechanical data   Material data</b>	
Color housing	black
Material housing	Plastic
<b>Mechanical data   Mounting data</b>	
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Height	105 mm
Width	41,6 mm
Depth	85,1 mm
<b>Environmental characteristics   Climatic</b>	
Operating temperature min.	-25 °C
Operating temperature max.	60 °C
Storage temperature min.	-40 °C
Storage temperature max.	85 °C
<b>Connection type 2</b>	
Connection type 1	8
Family construction form	RJ45
Gender	female
Color contact carrier	black
No. of poles	8
PIN 1	TD +
PIN 2	TD -
PIN 3	RD +
PIN 4	n.c.
PIN 5	n.c.
PIN 6	RD -
PIN 7	n.c.
PIN 8	n.c.
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4
PIN 1	24 V DC (UB 1)
PIN 2	0 V
PIN 3	PE
PIN 4	n.c.