


## **INTERFACE TERMINAL RELAY**


IN: 24 VDC - OUT: 24 VDC / 0.2 A

Transistor 0.2 A 24 V DC Control current 0.1 mA (5 V DC) Screw terminals

## Link to Product

## Illustration

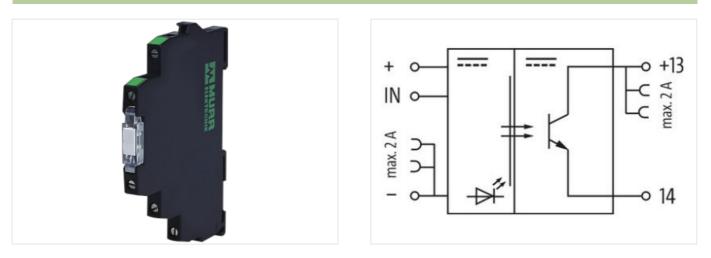



Product may differ from Image



## Commercial data

ECLASS-6.0	27371604	
ECLASS-6.1	27371604	
ECLASS-7.0	27371604	
ECLASS-8.0	27371604	
ECLASS-9.0	27371604	
ECLASS-10.1	27371604	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-20

Murrelektronik Canada | 2840 Argentia Rd Unit #9 | L5N 8G4 Mississauga, ON | Fon +1 905-362-2211 | Fax +1 905-362-2101 | shop@murr.ca | shop.murr.ca



ECLASS-11.1	27371604
ECLASS-12.0	27371604
ETIM-5.0	EC001504
customs tariff number	85414900
GTIN	4048879024518
Packaging unit	1
Electrical data   Input	
Input voltage OFF DC min.	0 V
Input voltage OFF DC max.	1,5 V
Input voltage DC	24 V
Input voltage DC min.	1,9 V
Input voltage DC max.	30 V
Input current DC max.	16 mA
Electrical data   Output	
Switch off delay max.	20 μs
Quiescent current OFF max.	0,1 mA
Switching frequency max.	20000 Hz
Voltage switching DC min.	5 V
Switching voltage DC max.	48 V
Switching current min.	0,1 mA
Switching current max.	0,2 A
Voltage drop DC max.	1,2 V
Diagnostics	
Status indication LED	yellow
Device protection   Electrical	
Rated insulation voltage	3750 V
Device protection   Media	
Flame resistance	flame retardant
Mechanical data   Material data	
Color housing	black
Material housing	Plastic
Mechanical data   Mounting data	
	easthaant
Mounting method	geschnappt
Suitable for mounting type Height	mounting rail, (EN 60715) 91 mm
Width	6,2 mm
Depth	71 mm
Environmental characteristics   Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 ℃
Storage temperature min. Storage temperature max.	-40 °C 80 °C
Connection type 5	
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1 Connection	- Screw terminals SK
Family construction form	terminal
ormation in this Product-PDF has been compiled with the	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-20

Murrelektronik Canada | 2840 Argentia Rd Unit #9 | L5N 8G4 Mississauga, ON | Fon +1 905-362-2211 | Fax +1 905-362-2101 | shop@murr.ca | shop.murr.ca



Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	+
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	In
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	14
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	13 +

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-20

Murrelektronik Canada | 2840 Argentia Rd Unit #9 | L5N 8G4 Mississauga, ON | Fon +1 905-362-2211 | Fax +1 905-362-2101 | shop@murr.ca | shop.murr.ca