

A3 Hood, IP67

Single locking lever, top entry M20


АЗ Hood Single locking lever IP67

Technical data will be only guaranteed with Murrelektronik components.

Link to Product

Illustration



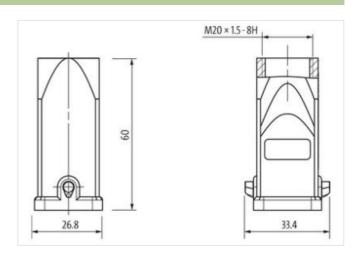

Product may differ from Image

Commercial data	
ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
customs tariff number	85389099
GTIN	4048879643023
Packaging unit	1
Installation	
Cable outlet	straight
Installation Connection	
Mounting set	M20
Mating cycles min.	500
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, locked, with screw connection
Mechanical data	
Housing type	Hood
Mechanical data Material data	



Coating housing	powder-coated
Coating locking	verzinkt
Material housing	Zinc die-casting
Locking material	Steel
Mechanical data Mounting data	
Size	A3
Height	60 mm
Width	26,8 mm
Depth	33,4 mm
Looking techniques	Single locking lever
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	100 °C
Climatic category (EN IEC 60068-1)	40/100/21