

Passe-cloison M12 femelle codé X droit / RJ45 mâle coudé Gigabit

Adaptateur
M12 – RJ45, branchement vers le haut
Femelle droit – femelle 90°
8 pôles
Codage X
Gigabit
Ethernet CAT6A
blindé
Écrou d'accouplement

Lien vers le produit

Illustration



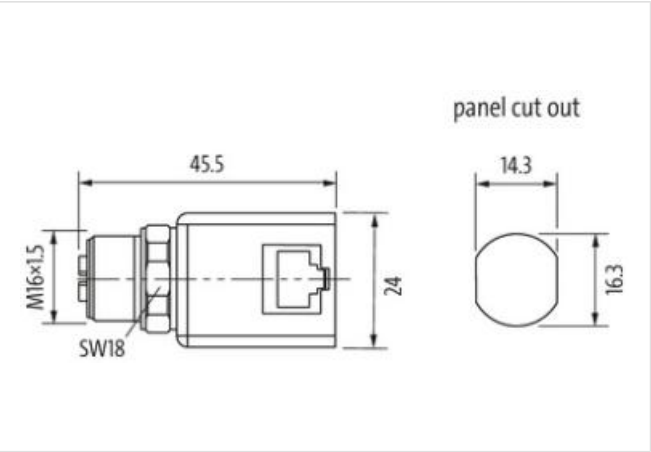


Photo non contractuelle

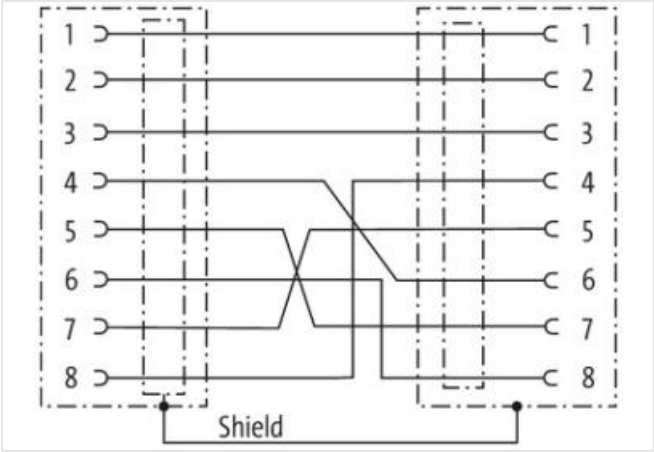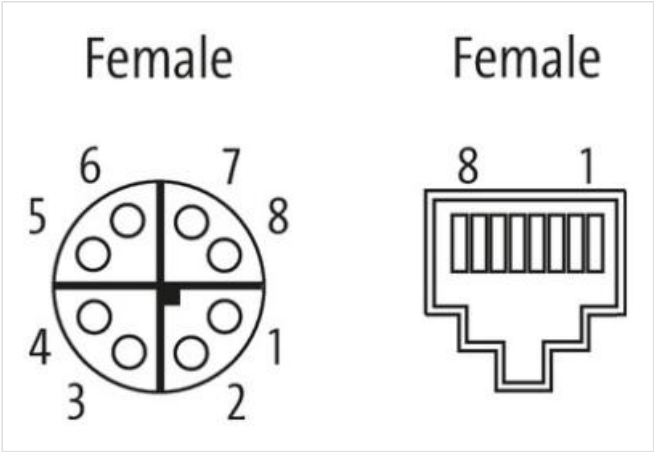

Family construction form	M12
Codage	X
données commerciales	
ECLASS-6.0	27143423
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440106

ECLASS-10.1	27440106
ECLASS-11.1	27440106
ECLASS-12.0	27440106
ETIM-5.0	EC002640
GTIN	4048879699419
Numéro du tarif douanier	85366990
Unité de conditionnement	1

Caractéristiques électriques | Alimentation

Courant de service max.	1,75 A
-------------------------	--------

Caractéristiques techniques | Communication industrielle

Protocole pris en charge	Ethernet
Paramètres de transmission	CAT6A

Installation | Raccordement

Ouverture de clé	SW18
------------------	------

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.