
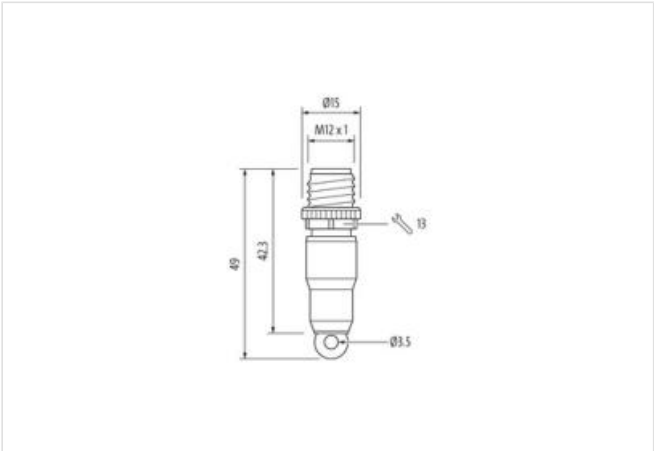
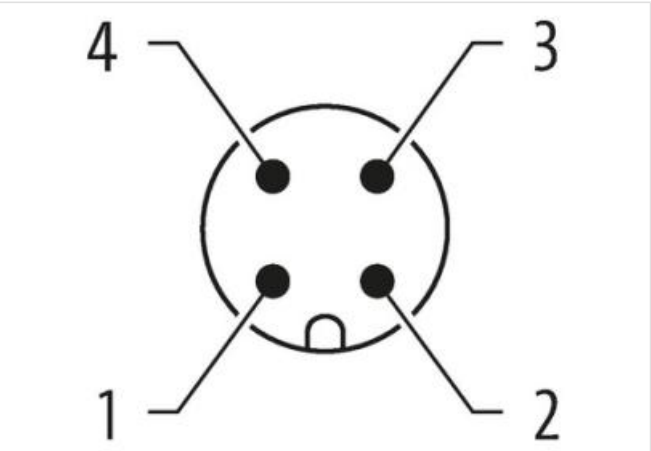


M12 MALE 0° CODING PLUG JUMPER 1-4

Terminating plug  
Male M12  
4-pole (bridged)

Link to Product

Illustration

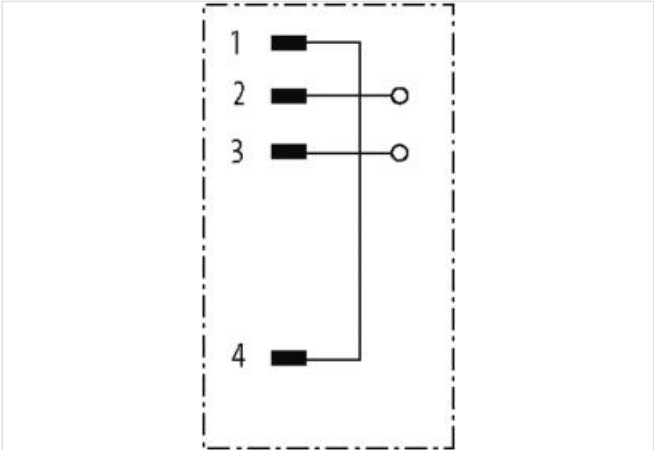

Product may differ from Image

Side 1	
Mounting method	inserted, screwed
Family construction form	M12
Coding	A
No. of poles	4
Width across flats	SW13
Degree of protection (EN IEC 60529)	IP67
Commercial data	
ECLASS-6.0	23111190
ECLASS-6.1	27260702
ECLASS-7.0	27440390
ECLASS-8.0	27440190
ECLASS-9.0	27440190
ECLASS-10.1	27440190

ECLASS-11.1	27440190
ECLASS-12.0	27440190
ETIM-5.0	EC001855
customs tariff number	85366990
GTIN	4048879714303
Packaging unit	1
<b>Electrical data   Supply</b>	
Operating voltage AC max.	30 V
Operating voltage DC max.	30 V
Current operating per contact max.	4 A
<b>Installation   Connection</b>	
Tightening torque	0,6 Nm
<b>Device protection   Electrical</b>	
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	0,8 kV
Material group (IEC 60664-1)	I
<b>Mechanical data   Material data</b>	
Coating locking	Nickel
Locking material	Zinc die-casting
<b>Mechanical data   Mounting data</b>	
Mounting method	inserted, screwed, Shaking protection
<b>Environmental characteristics   Climatic</b>	
Operating temperature min.	-25 °C
Operating temperature max.	85 °C
<b>Conformity</b>	
Product standard	DIN EN 61076-2-101 (M12)